

CONTACT INFORMATION

Ada-General Manager

Email: info@tefork.com


Call/whatsapp/wechat: +86-19811836636

We sell forklift tynes for all makes and models of forklift.

Our tynes come in a range of capacities and sizes,
and can be custom made to suit your requirements.

Tynes are also known as fork arms. Class II Tynes, Class III Tynes, Class IV Tynes available

How to Measure Forklift Tynes

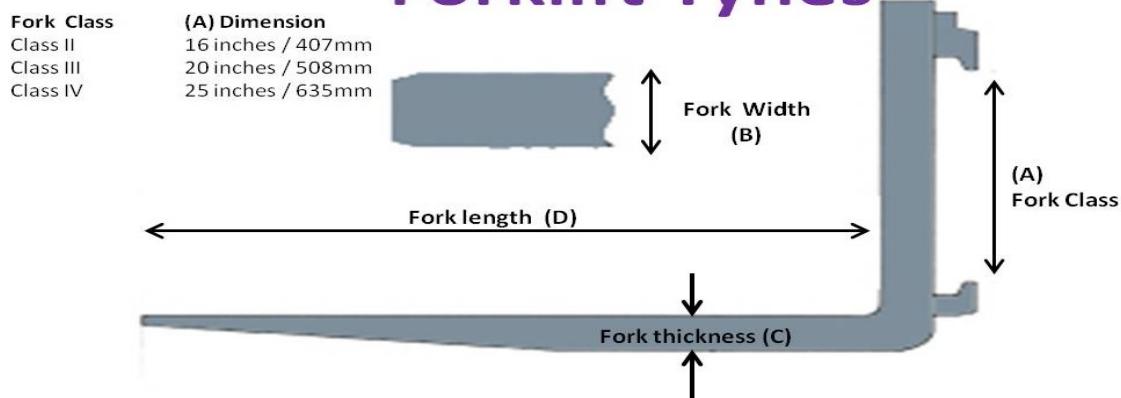

How to order forks?

Before ordering tynes, you will need to know which forks you require.

The diagram above will assist you with your tyne choice.

Step 1: Carriage Size:

Firstly you will need to determine the size of your carriage to work out which class of tynes you require. Tynes are classified as Class II, Class III or Class IV depending on the size of the forklift carriage to which they attach. This is measurement "A" on the diagram above.

Step 2: Tyne dimensions

length: measure from the front of the fork all the way to the end of the tip.

width: measure the fork from one side to the other

thickness: take this measurement near the back of the fork as the front may be worn thin.

Step 3: Capacity of the Forklift

Look on or near the dashboard of the forklift and find the data tag. This will tell you the forklift capacity. Each set of forks has a rated capacity. This is the maximum lifting capacity for a set of 2 forks.

Scroll down to view a list of the most common tyne sizes. We keep most sizes in stock.

Please contact us first to check availability.


If the size you require is not there, please contact us as we also have other sizes available.

ITA Fork Tyres / Fork Arms / Load Arms for Forklift

These are the most common type of fork tyne. (also referred to as FEM fork tyres)

Capacity ranges from 1,200kg to 8,000kgs

Lengths from 1070mm to 2440mm.

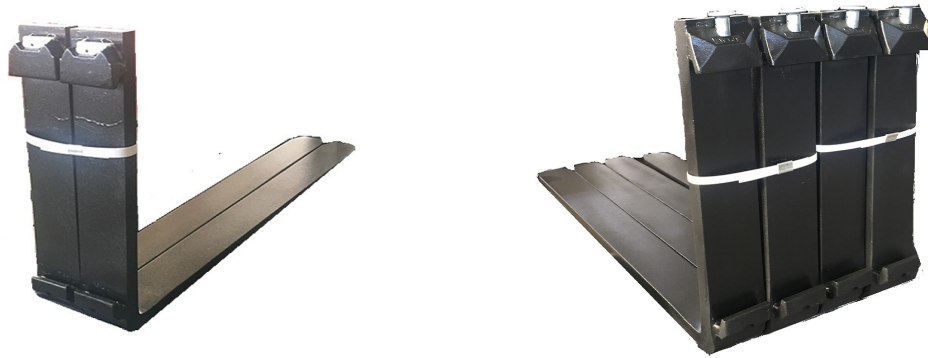



Capacity/pair kg@500mm load centre	Mounting class(A)	Fork width	Fork Thickness	Fork length mm (D)		Weight/piece
		mm(B)	mm (C)	mm(D)	inches(D)	kg
1.0T	II	32	100	920	36	34
	II	32	100	1070	42	38
	II	32	100	1220	48	41
	II	32	100	1370	54	45
	II	32	100	1520	60	49
1.5-1.8T	II	35	100	920	36	37
	II	35	100	1070	42	41
	II	35	100	1220	48	45
	II	35	100	1370	54	49
	II	35	100	1520	60	54
	II	35	100	1670	66	58
	II	35	100	1820	72	62
2.0T	II	40	100	920	36	42
	II	40	100	1070	42	46
	II	40	100	1220	48	51
	II	40	100	1370	54	56
	II	40	100	1520	60	60
	II	40	100	1670	66	65
	II	40	100	1820	72	70

2.5T	II	40	122	1070	42	57
	II	40	122	1220	48	63
	II	40	122	1370	54	69
	II	40	122	1520	60	75
	II	40	122	1670	66	81
	II	40	122	1820	72	86
3.0T	III	45	122	1070	42	67
	III	45	122	1220	48	74
	III	45	122	1370	54	80
	III	45	122	1520	60	86
	III	45	122	1670	66	93
	III	45	122	1820	72	99
	III	45	122	2000	79	107
	III	45	122	2440	96	125
3.5-4T	III	50	122	1070	42	74
	III	50	122	1220	48	81
	III	50	122	1370	54	88
	III	50	122	1520	60	95
	III	50	122	1670	66	102
	III	50	122	1820	72	109
	III	50	122	2000	79	118
	III	50	122	2440	96	139
4.5T	III	50	150	1070	42	92
	III	50	150	1220	48	101
	III	50	150	1370	54	109
	III	50	150	1520	60	118
	III	50	150	1670	66	127
	III	50	150	1820	72	136
	III	50	150	2000	79	146
	III	50	150	2440	96	172
5.0T	IV	50	150	1220	48	110
	IV	50	150	1370	54	119
	IV	50	150	1520	60	128
	IV	50	150	1670	66	136
	IV	50	150	1820	72	145
	IV	50	150	1970	77 1/2	154
6.0T	IV	60	150	1220	48	130
	IV	60	150	1370	54	141
	IV	60	150	1520	60	151
	IV	60	150	1670	66	162
	IV	60	150	1820	72	172
	IV	60	150	1970	77 1/2	183

6.0T	IV	65	150	2000	79	199
	IV	65	150	2120	83 1/2	209
	IV	65	150	2220	87 1/2	216
	IV	65	150	2270	89 1/2	220
	IV	65	150	2440	96	233
7.0T	IV	65	150	1220	48	140
	IV	65	150	1370	54	151
	IV	65	150	1520	60	163
	IV	65	150	1670	66	174
	IV	65	150	1820	72	186
	IV	65	150	1970	77 1/2	197
7.0T	IV	70	150	2000	79	214
	IV	70	150	2120	83 1/2	224
	IV	70	150	2220	87 1/2	232
	IV	70	150	2270	89 1/2	236
	IV	70	150	2440	96	250
8.0T	IV	70	170	1220	48	171
	IV	70	170	1370	54	185
	IV	70	170	1520	60	199
	IV	70	170	1670	66	213
	IV	70	170	1820	72	227
	IV	70	170	1970	77 1/2	241
8.0T	IV	75	170	2000	79	260
	IV	75	170	2120	83 1/2	272
	IV	75	170	2220	87 1/2	282
	IV	75	170	2270	89 1/2	287
	IV	75	170	2440	96	304


Eye-Type Fork Tynes/ Fork Arms / Load Arms for Forklift

Eye type tynes and accessories to suit forklifts and loaders that are fitted with pin type carriages.
Capacity ranges from 1,000kgs to 75,000kg
Lengths from 1070mm to 3600mm.

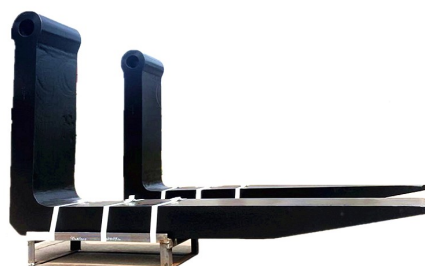

Blank Forks

Blank forks is the kind of forks without hook or other accessories on the back of the fork



Special Mount Fork Tynes/ Fork Arms / Load Arms for Forklift



can supply specialist mount tynes to suit any application.

Specialist mounts include –

1. Square hook carriage mount.
2. Direct bolt mount.
3. Rollerised mount.
4. Quick release mount.
5. Inverted mounted tynes.
6. Tyne blanks – no mounts fitted.
7. Tyne flats – flat blade with no vertical back section.